

Indoor Channel Capacity Measurement of 2 x 2 MIMO Polarization Diversity Antenna

Mohamed Nasrun Osman¹, Mohamad Kamal A. Rahim², Mohamad Rijal Hamid³, Mohd Fairus Mohd Yusoff⁴, Mohamad Zoinol Abidin A. Aziz⁵, Muzammil Jusoh⁶, Muhammad Azfar Abdullah⁷, Nursaidah Muhamad Nadzir⁸

^{1,6}Bioelectromagnetics Research Group, School of Computer and Communication Engineering, Universiti Malaysia Perlis, Pauh Putra Main Campus, 02600 Arau, Perlis, Malaysia

^{2,3,4,7,8}Advanced RF and Microwave Research Group, Faculty of Electrical Engineering, Universiti Teknologi Malaysia, 81310 Johor Bahru, Johor, Malaysia

⁵Centre for Telecommunication Research and Innovation, Universiti Teknikal Malaysia Melaka, Hang Tuah Jaya, 76100 Durian Tunggal, Melaka, Malaysia

Article Info

Article history:

Received Jan 15, 2018

Revised Mar 12, 2018

Accepted Mar 28, 2018

Keywords:

Channel capacity

Multiple-input-multiple-output

Polarization diversity

Polarization reconfigurable

antenna

Spatial diversity

ABSTRACT

This paper presents the channel capacity investigation and the polarization reconfigurable antenna analysis for MIMO system in an indoor scenario. A single and dual-port polarization reconfigurable antenna is used at the receiver end to study the effect of polarization diversity configurations towards the achievable performance of the channel capacity. The polarization reconfigurable antennas are developed through two techniques, which are slits perturbation for single-port and feeding network modification for dual-port. The benefits offered by the designed antennas are investigated when being used as a receiver in both line-of-sight (LOS) and non-line-of-sight (NLOS) scenarios. The results show the proposed antennas are suitable to be adopted and highly potential to improve the channel capacity of the MIMO systems.

Copyright © 2018 Institute of Advanced Engineering and Science.
All rights reserved.

Corresponding Author:

Mohamed Nasrun Osman

School of Computer and Communication Engineering,

Universiti Malaysia Perlis,

Pauh Putra Main Campus, 02600 Arau, Perlis, Malaysia.

Email: nasrun@unimap.edu.my

1. INTRODUCTION

A lot of people nowadays have used modern communication services in their daily life routines, thus contributed to the highly demanded for better data rate. One of the promising technologies that able to provide capacity improvement is Multiple-Input-Multiple-Output (MIMO) systems. As compared to traditional single-input single-output and single-input multiple-output systems, MIMO systems has higher diversity, ability to mitigate multipath fading and greater throughput without requiring more bandwidth and additional power [1], [2]. To further enhance the overall MIMO system performance with data rates increment, reconfigurable antennas (RAs) could be the solution. The use of RAs has been widely studied and investigated to produce much robust MIMO system in terms of channel quality, capacity and reliability [3]. The diversity feature, such as pattern [4], [5] and polarization [6], [7], or the combination of pattern-polarization diversities [8], [9] is exploited to increase the signal-to-noise ratio, which consequently improves the channel capacity. The use of polarization reconfigurable antenna (PRA) can achieve better capacities due to its ability to offer additional channels using several polarizations from different antennas element. Furthermore, the use of RAs also can offer compactness and cost reduction by arranging orthogonal polarized together instead of two physically space separation antennas [10], [11].

The authors have previously presented the compact single [12] and two ports [13] polarization diversity circular patch antenna. The antenna polarization mode is reconfigured using four RF switches embedded on the antennas radiating element and feeding network to shift the phase difference between two orthogonal modes existed on the patch, thus altering the polarizations of the antenna. Depending on the state of switching configurations, the polarization characteristics of these antennas can be reconfigured into multiple types of polarization modes—linear (LP), left-hand circular (LHCP) and right-hand circular polarization (RHCP).

In this paper, these antennas are used to investigate the performance of the system that utilized polarization diversity antenna in term of MIMO channel capacity enhancement. The field experiment in an indoor environment for both line-of-sight (LOS) and non-line-of-sight (NLOS) communication links is conducted to study the benefits offered by different polarization configurations at the receiver end. The analysis of the channel capacity measurement was done by using the scalar power correlation [14]. The performances comparison on the percentage of the channel capacity improvement or decrement is presented between reconfigurable versus non-reconfigurable antenna (reference) and between single-port (spatial diversity) against dual-port (polarization diversity) system.

2. MIMO CHANNEL MODEL

The wireless MIMO system is consists of multiple antennas at the transmitter and receiver connected wirelessly through transmission medium. Consider x as the input signal and y as the output signal, the relationship between the input and output of the MIMO system is described using equation (1) below [15].

$$y = Hx + \eta \tag{1}$$

where η is the noise generated in the propagation system, and H is the MIMO channel matrix. The MIMO channel matrix is the transfer function between transmit and receive antenna that represented by correlation coefficients, which the mathematical expression as [16].

$$H = \begin{pmatrix} \rho_{11} & K & \rho_{1n} \\ M & O & M \\ \rho_{m1} & L & \rho_{mn} \end{pmatrix}_{M \times N} \tag{2}$$

where ρ_{mn} is the power correlation coefficient of m transmit and n receive element. The correlation coefficient was calculated based on measurement data and can be defined into three different types: complex, envelope and power.

$$\rho_{mn} = \frac{\text{COV}_{mn}}{\sqrt{\sigma_{mm}^2} \sqrt{\sigma_{nn}^2}} \tag{3}$$

where is the covariance while σ_{mm} and σ_{nn} represents the variance of the input and output system, respectively. Equation (3) can be simplified, as shown in Equation (4) below [17]

$$\rho_{mn} = \frac{\sum_{m,n=1}^N (x_m - \bar{x})(y_n - \bar{y})}{\sqrt{\sum_{m=1}^M (x_m - \bar{x})^2} \sqrt{\sum_{n=1}^N (y_n - \bar{y})^2}} \tag{4}$$

where \bar{x} is the mean average of the input signal, and \bar{y} is the mean average of the output signal.

One of the methods to estimate the independent multiple channels between terminals is by using eigenvalue decomposition [18]. Here, the process diagonalizes matrix H and correlation matrix, R is represent by equation (5).

$$R = HH^H \text{ or } R = H^H H \tag{5}$$

where $[.]^H$ is the Hermitian Transposition (conjugate transpose). The purpose of calculating the R is to evaluate the received power for each Eigen channel.

For multiple transmitter and receiver antennas, the generalized formula for the average channel capacity, C of the system is denoted as [19].

$$C = \log_2 \left(1 + \psi_n \frac{SNR}{N} \right) \quad (6)$$

where ψ_n represents the eigenvalue and SNR is signal-to-noise-ratio. From the equation (6), it is realized that in order to improve the channel capacity of the MIMO, the eigenvalue is the variable that need to be manipulated. The unit for capacity is bits/s/Hz.

3. MIMO EXPERIMENTAL SETUP

In this section, it is explained the results of research and at the same time is given the compreh The 2 x 2 MIMO channel capacity measurements using PRAs was conducted in the Microwave Laboratory, which consists of concrete wall, glass windows, tables, chairs, personal computers, cabinets and bookshelves. The size of laboratory is 14.4 meter width, 22.7 meter length and 3.4 meter height. This situation is set up to create and investigate the MIMO performances in a multipath and moderate density environment.

In particular, the MIMO performance is investigated when employed PRAs at the receiver end. Note that during the data being measured and captured, we were moved inside the technician room to minimize the interference come from human presence and activities, so that the testing environment is entirely static. For each antennas configuration, the changed solely made to the receiver part. Other than that, it remains the same to eliminate any factors that could possibly change the channel characteristics such as the position of the transmitter and receiver. For the single port antenna, the identical structure has been added and fabricated to demonstrate the spatial diversity 2 x 2 MIMO. In order to validate the improvement of the channel capacity by using PRAs, two monopole antennas are used at the receiver end for comparison (reference configuration).

To create and construct the NLOS scenario, a white board with a size of 2 m x 2.5 m is placed in front of the transmitter antennas at a distance of 2 meters to block the direct propagation path between transmitter and receiver, whilst the position of the transmitter and receiver remains unchanged. Both transmitter and receiver were located at the fix height of 1.5 m, and were separated at a distance of approximately 12 m. Note that the distance between transmitter and receiver can affect the channel capacity, due to the changes of the signal strength. The measurements were performed at 2.45 GHz, with 0 dBm power transmission at each antenna port ($P_t=0$ dBm). The antennas at the transmitter were placed using spatial diversity and physically/distance separated from each other at displacements of one λ (where λ is the wavelength at the operating frequency), or approximately 12.5 cm.

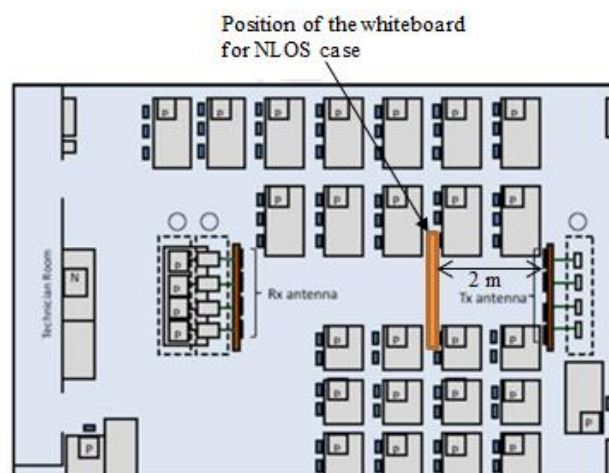


Figure 1. Floor layout of measurement campaign

The signal is generated (using Signal Generator Hittite HMC-T2000 700MHz-8 GHz) at the transmitter and is amplified (using Microwave Amplifier Agilent 87415A 2-8 GHz) at the receiver side and

being detected by the RF power sensor for every 1 second time intervals for 30 minutes. The power meter (using Amitec Microwave Power Sensor) displayed the power level and the data was recorded into the computer through the connected hyper terminal interface. The devices are connected together using 1 meter RF cable with a 1.3 dB cable loss. Then, the measurements data are imported and combined in the excel worksheet. The parameters H , ρ and ψ were calculated using programming coded developed in MATLAB software and finally the channel capacity value is determined. In this experimental campaign, the omnidirectional monopole antenna was used at the transmitter.

4. CHANNEL CAPACITY RESULTS AND DISCUSSIONS

In this section, the 2 x 2 MIMO channel capacity analysis and discussions using the proposed PRAs is presented. It is important to note that the results presented here is a site specific case, or in other words, the result is valid and true only for this specific measurement setup and conditions. Any changes and variations to the setup (except the replacement of the receiver antenna with PRAs) such as antennas distance, height or surroundings, could obviously give different results.

As discussed in the previous section, the MIMO channel capacity calculation was done using scalar power correlation method. Note that throughout the measurement campaign, the polarization of the antennas is switched manually. To investigate the benefits offered by each polarization configurations, Table I tabulate the channel capacity of the measurement 2 x 2 MIMO for all transmitter-receiver polarization configurations. The percentage of improvement or decrement for each configuration is calculated based on comparison with reference configurations.

As listed in Table 1, it can be noted that the channel capacity improvement with the proposed antennas varies as a function of the different receiver configurations. It is found that the channel capacity for LOS scenario is better than NLOS as the channel correlation is relatively low, which result in increased of eigenvalue and consequently channel capacity. For spatial diversity configuration, the proposed antenna outperforms a conventional references one wavelength separated monopole antenna in configuration 1E for LOS scenario. Meanwhile, for NLOS scenario, the best channel capacity is achieved through configuration 1C. Other configurations (configuration 1B, 1D and 1E) guarantees higher channel capacity than reference configuration. It is also observed that the capacity with spatial diversity PRAs did not improved significantly when the receiver and transmitter in LOS scenario as the channel conditions are relatively good. Configuration 1A (LP-LP) and 1F (RHCP-RHCP) is generally the worst configurations in both LOS and NLOS scenarios as it shown capacity reduction as referred to typical configuration.

Table 1. Channel Capacity Results of the 2 x 2 MIMO as Respect to Reference Configurations

Transmitter-Receiver Polarization Configurations			Channel Capacity (bits/s/Hz)		Percentage of improvement/decrement (±%)	
			LOS	NLOS	LOS	NLOS
Spatial diversity		Reference	1.0091	0.1274	NA	NA
	1A	LP-LP	0.2867	0.0866	-71.6	-32.0
	1B	LP-LHCP	0.0144	0.2430	-98.5	+90.7
	1C	LP-RHCP	0.4652	0.3688	-53.9	+189.5
	1D	LHCP-RHCP	0.0075	0.3463	-99.3	+171.8
	1E	LHCP-LHCP	1.9463	0.1787	+92.9	+40.3
	1F	RHCP-RHCP	0.3332	0.0605	-67.0	-52.5
Polarization diversity	2A	Orthogonal LPs	0.0441	0.1793	-95.6	+40.7
	2B	Orthogonal CPs	1.5938	0.0981	+57.9	-23.0

For polarization diversity PRAs against reference performance, channel capacity improvement of approximately 50% is obtained in configuration 2B for LOS and configuration 2A for NLOS scenarios. The achievable channel capacity results showed that it is very effective to have a configuration that exploits polarization diversity to improve the performance gains of the MIMO systems due to its consistent behavior, especially for multipath NLOS scenarios. This is due to the facts that, instead of employing fix polarization at the receiver, the antennas are capable to function with multiple type of polarization mode providing additional channels in MIMO system. Hence, by using PRAs at the receiver, the polarizations could be switched for selecting the best polarization configuration to enable an increase in SNR that eventually improve the channel capacity.

Based on the findings, it shows that not all configurations of PRAs will provide better channel capacity than reference configuration. For some transmitter-receiver polarization configurations, the channel capacity obtained are lower than non-reconfigure antennas. In this specific measurement setup, the best configuration is 1E (LHCP-LHCP), as it shows consistent behavior with channel capacity improvement in both LOS and NLOS scenarios. Moreover, as predicted, spatial diversity technique works well with better percentage of improvement (92.9% for LOS and 189.5% for NLOS) as compared with polarization diversity technique. Even though the capacity of improvement for the polarization diversity is not that good as spatial diversity technique, it contributes significant improvement of capacity (improved by 40.7% for LOS and 57.9% for NLOS) with better space optimization - less space occupied. It is also observed that the PRAs performed well in NLOS scenario due to the fact that PRAs unique capability to cater the multipath fading rich attributed by transmission scattering and reflections phenomenon.

It is found that spatial diversity has been identified can provide better performance in term of capacity compared to polarization diversity. The spatial degree of freedom is extremely potential to increase the MIMO channel capacity. However, this method only will be very useful for the system which has no restrictions in term of space and volume. Spatial diversity is impractical to be applied for limited space system. In this type of system, polarization diversity is more efficient and suitable for due to the compactness of the multi-elements structure.

5. CONCLUSION

In this paper, the channel capacity measurement campaign and performance investigation of the 2 x 2 MIMO systems when exploiting the polarization diversity characteristic is presented. The designed antennas of single and dual port PRAs are used at the receiver end, while space-separation omni-directional monopole antennas are used as transmitter antenna. We showed that channel capacity is improved as compared to non-reconfigure antenna (typical configuration) when polarization diversity which offering multiple type of polarizations is applied at the receiver end. Configuration 1E (LHCP-LHCP) and 2B (orthogonal CPs) is the best configurations for LOS scenario with percentage capacity improvement of 92.9% and 57.9%, respectively. Meanwhile, in the NLOS scenario, the configurations 1C (LP-RHCP) for spatial diversity and 2A (orthogonal LPs) performs better than other configurations. The results proved the use of reconfigurable antennas is an effective solution to obtain good communication link capacity for the systems that have constraints on the space such as handheld devices and limited-space MIMO system.

ACKNOWLEDGEMENTS

The author thanks Universiti Malaysia Perlis and Research Management and Innovation Centre for the support of the research work under grant 9001-00569.

REFERENCES

- [1] M. Mowlér, M. B. Khalid, and B. Lindmark, "Reconfigurable monopole array with MEMS switches for MIMO systems," in IEEE Antennas and Propagation Society International Symposium, 2008, pp. 1–4.
- [2] K. Odeyemi and E. Ogunti, "Capacity Enhancement for High Data Rate Wireless Communication System," *International Journal of Electrical and Computer Engineering*, vol. 4, no. 5, pp. 800–809, 2014.
- [3] B. A. Cetiner, E. Akay, E. Sengul, and E. Ayanoglu, "A MIMO system with multifunctional reconfigurable antennas," *Antennas Wirel. Propag. Lett.*, vol. 5, no. 1, pp. 463–466, 2006.
- [4] Z. Anshi, C. Zili, W. Jianbin, and Z. Yunhui, "Study on Pattern Reconfiguration of Plasma Antenna Excited by Surface Wave," *TELKOMNIKA (Telecommunication, Computing, Electronics and Control)*, vol. 12, no. 9, pp. 6658–6666, 2014.
- [5] D. Piazza, N. J. Kirsch, A. Forenza, R. W. Health Jr, and K. R. Dandekar, "Design and evaluation of a reconfigurable antenna array for MIMO systems," *IEEE Trans. Antennas Propag.*, vol. 56, no. 3, pp. 869–881, 2008.
- [6] P.-Y. Qin, A. R. Weily, Y. J. Guo, and C.-H. Liang, "Polarization reconfigurable U-Slot patch antenna," *IEEE Trans. Antennas Propag.*, vol. 58, no. 10, pp. 3383–3388, Oct. 2010.
- [7] J. F. Valenzuela-valdés, M. F. Manzano, and L. Landesa, "Deepening true polarization diversity for MIMO system," *IEEE Antennas Wirel. Propag. Lett.*, vol. 11, pp. 933–936, 2012.
- [8] D. Piazza, P. Mookiah, M. D'Amico, and K. R. Dandekar, "Experimental analysis of pattern and polarization reconfigurable circular patch antennas for MIMO systems," *IEEE Trans. Veh. Technol.*, vol. 59, no. 5, pp. 2352–2362, 2010.
- [9] D. Piazza, P. Mookiah, D. Michele, and K. R. Dandekar, "Pattern and polarization reconfigurable circular patch for MIMO systems," in European Conference on Antennas and Propagation, 2009, pp. 1047–1051.

- [10] B. S. Collins, "Polarization diversity antennas for compact base stations," *Microw. J.*, vol. 43, no. 1, pp. 76–88, 2000.
- [11] F. Qingyuan, S. Lizhong, J. Ming, H. Yong, and Q. Xiaolin, "Wideband Dual-linear Polarized Stacked Patch Antenna with Asymmetry Feeding," *TELKOMNIKA (Telecommunication, Computing, Electronics and Control)*, vol. 12, no. 1, pp. 106–112, 2014.
- [12] M. N. Osman, M. K. a. Rahim, P. Gardner, M. R. Hamid, M. F. M. Yusoff, and H. a. Majid, "An Electronically Reconfigurable Patch Antenna Design for Polarization Diversity with Fixed Resonant Frequency," *Radioengineering*, vol. 24, no. 1, pp. 45–53, Apr. 2015.
- [13] M. N. Osman, M. K. A. Rahim, M. R. Hamid, M. F. M. Yusoff, and H. A. Majid, "Compact Dual-Port Polarization-Reconfigurable Antenna With High Isolations for MIMO Application," *IEEE Antennas Wirel. Propag. Lett.*, vol. 15, pp. 456–459, 2016.
- [14] M. Z. A. A. Aziz and M. K. A. Rahim, "Wireless MIMO channel capacity using double stage diversity technique," *Wirel. Pers. Commun.*, vol. 85, no. 4, pp. 2067–2081, Jul. 2015.
- [15] M. F. A. Kadir, M. K. Suaidi, and M. Z. A. Aziz, "MIMO beamforming network having polarization diversity," in *European Conference on Antennas and Propagation*, 2009, pp. 1743–1747.
- [16] A. M. Abdin, "Design of dual-polarization stacked arrays for wireless communications," *Prog. Electromagn. Reseach*, vol. 4, no. 4, pp. 409–412, 2008.
- [17] K. Masuda, "Correlation of MIMO and its evaluation," in *IEEE International Symposium on Antennas and Propagation Antennas and Propagation Society*, 2005, pp. 355–358.
- [18] J. P. Kermaol, P. E. Mongensen, S. H. Jensen, J. B. Andersen, F. Frederiksen, T. B. Sorensen, and K. I. Pedersen, "Experimental investigation of multipath richness for multi-element transmit and receive antenna arrays," in *IEEE Conference Proceedings on Vehicular Technology*, 2000, pp. 2004–2008.
- [19] Alex Gershman and Nikos Sidiropoulos, *Space-time processing for MIMO communications*. England: Wiley, 2005.

BIOGRAPHIES OF AUTHORS



Mohamed Nasrun Osman was born in November 1987. He received his Electrical Engineering degree major telecommunication from Universiti Teknologi Malaysia in 2010. From 2010 to 2012, he was an assistant director at Malaysian Communication and Multimedia Commission, responsible on implementation and monitoring of communication and technology project specifically in rural area. He obtained his PhD degree in Electrical Engineering at the Universiti Teknologi Malaysia. He is currently worked at Universiti Malaysia Perlis as senior lecturer. His research interests include reconfigurable antenna design, wearable antenna, RF design and wireless MIMO system.



Mohamad Kamal A. Rahim was born in Alor Star Kedah Malaysia on 3rd November, 1964. He received the B Eng degree in Electrical and Electronic Engineering from University of Strathclyde, UK in 1987. He obtained his Master Engineering from University of New South Wales, Australia in 1992. He graduated his PhD in 2003 from University of Birmingham, U.K., in the field of Wideband Active Antenna. From 1992 to 1999, he was a lecturer at the Faculty of Electrical Engineering, Universiti Teknologi Malaysia. From 2005 to 2007, he was a senior lecturer at the Department of Communication Engineering, Faculty of Electrical Engineering, Universiti Teknologi Malaysia. He is now a Professor at Universiti Teknologi, Malaysia. His research interest includes the design of active and passive antennas, dielectric resonator antennas, microstrip antennas, reflect-array antennas, electromagnetic band gap (EBG), artificial magnetic conductors (AMC), left-handed metamaterials and computer aided design for antennas.



Mohamad Rijal Hamid received the M.Sc. degrees in Communication Engineering from the Universiti Teknologi Malaysia, Johor Bahru, Malaysia, in 2001 and the PhD Degree at the University of Birmingham, Birmingham, United Kingdom. He has been with Universiti Teknologi Malaysia at the Faculty of Electrical Engineering, UTM since 1999. Currently his position is a Senior Lecturer. His major research interest is reconfigurable antenna design for multimode wireless applications.



Mohd Fairus Mohd Yusoff is a graduate faculty member of the Faculty of Electrical Engineering, UTM. He joined UTM in 2002 as a Tutor. He received his Bachelor in Engineering (Electrical-Telecommunication) in 2002 and Master of Electrical Engineering (Electrical-Electronics and Telecommunications) in 2005 from Universiti Teknologi Malaysia. He obtained his PhD in 2012 from University of Rennes 1, France in area of Signal Processing and Telecommunication. His main research interest and areas is antenna design, millimeter waves and microwave devices.



Mohamad Zoinol Abidin Abd Aziz received his Master and PhD in Electrical Engineering from Universiti Teknologi Malaysia UTM in 2005 and 2015 respectively. He is lecturer at Universiti Teknikal Malaysia Melaka (UTeM) since 2006. His research area are microwave component design, antenna design and MIMO system.



Muzammil Jusoh is currently working with Universiti Malaysia Perlis (UniMAP) as a senior lecturer and researcher based in School of Computer and Communication Engineering (SCCE). Experienced as RF and Microwave Engineer for Telekom Malaysia Berhad (TM) Company from 2006-2009. Experience as an engineer (team leader) of Specialized Network Services (SNS) Department based in TM Senai Johor. Do preventive and corrective maintenance of ILS, NDB, DVOR, repeater, microwave system, VHF and UHF based on contract wise; Department Civil Aviation (DCA), TUDM, PDRM, ATM, Tanjong Pelepas Port (PTP), MCMC and JPS (Hidrologi Dept.). He has received PhD in Communication Engineering from UniMAP in 2013. While received MsC (2010) in Electronic Telecommunication Engineering and Bachelor Degree (2006) in Electrical-Electronic and Telecommunication Engineering from Universiti Teknologi Malaysia (UTM). Manage to publish a number of quality journals such as IEEE AWPL, MOTL, IJAP, PIER and Radio Engineering and more than 50 conference papers. His research interests include antenna design, reconfigurable antenna, MIMO, UWB and wireless communication system. Currently, supervising a number of PhD and MsC students and also managing few grants under Ministry of Higher Education Malaysia



Muhammad Azfar Abdullah was born in Selayang, Selangor Malaysia in 1987. He received the B Eng degree in Electrical Engineering major in telecommunication from Universiti Teknologi Malaysia in 2010 and M.S. degree in electrical engineering from Universiti Teknologi Malaysia in 2014. He is currently PhD. Degree in electrical engineering at University Teknologi Malaysia. From 2010 to 2011, he was a process engineer at Infineon Sdn Bhd Kulim Kedah. His research interest includes textile antenna design and artificial magnetic conductor (AMC).



Norsaidah Muhamad Nadzir received her B. Eng. Degree in Electrical Engineering (Computer Engineering) from Universiti Teknologi Malaysia in 2016. She is currently pursuing her M. Eng. Degree in Electrical Engineering in Universiti Teknologi Malaysia. Her research interest includes RFID antennas for readers and tags, computer aided design for antennas, small antennas, computer systems, and wireless sensor networks.